


Slim, 3,000 Amp
Flexible current probe
Flexible clamp meter

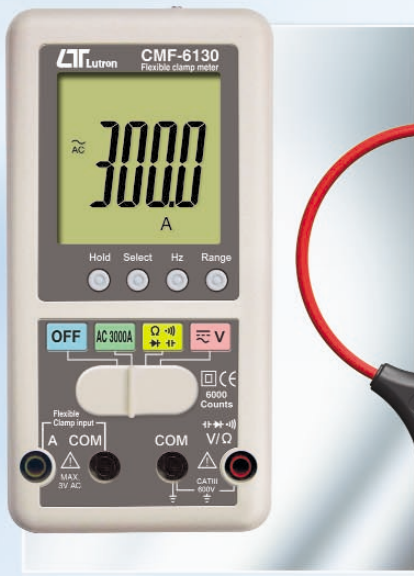

FLEXIBLE CLAMP METER

Model : CMF-6130

- * Flexible clamp meter, complete set with meter and separate slim flexible clamp probe, easy and convenient to measure the ACA up to 3000 A (auto range). The meter also has more other features available for the ACV. DCV, ohm, capacity, diode, continuity, Hz... measurement.
- * Flexible probe length : 600 mm (23.6 inch). Flexible probe diameter : 8 mm.
- * AC 3000A : auto range.
- * V : ACV, DCV, Hz measurement automatically.
- * Ω: Ohm, Diode, Continuity, Capacitance automatically.
- * Function slide switch : AC 3000A/ohm/V
- * Push button Keys : Hold, Select, Hz , Range.
- * Large LCD display, 6,000 counts.
- * CAT III 600V, Auto power off.
- * Power : DC 9V battery (006 P).
- * Size : 151 x 78 x 43 mm.
- * Complete set with Flexible clamp probe, meter, test leads and soft carrying case.



Slim Flexible current probe, 3000 Amp

Model : CPS-3100

- * Range : 30 A/300 A/3000 A.
- * Output sensitivity : 100 mV/A, 10 mV/A, 1 mV/A.
- * Output voltage : 3 ACV (30 A, 300 A, 3000 A).
- * Flexible probe length : 600 mm (23.6 inch). Flexible probe diameter : 8 mm.
- * When changing the new probe, the calibration procedures are not necessary to be executed.
- * Output cable : 2 cables (4 meters in length), use the banana plugs, durable and safety.
- * Power supply : DC 1.5V battery (UM-3/AA) x 2 PCs or DC 9V adapter in. AC to DC 9V adapter is optional.
- * CPS-3100 can cooperate any kind DMM (ACmV meters), if those meters are built-in the ACV mV measurement range to be used as the AC 3000 Amps (max.) current meter.